


UBC COATED PYTHONS

Designed specifically to meet the combined performance requirements of durability, fire performance and flexibility.

- BS476 parts 7 & 6 Class 0 Coating
- Tough and durable protective jacket
- Suitable for demanding environments — excellent physical properties and mechanical strength
- Available in black or white colour finishes
- UV resistant option available

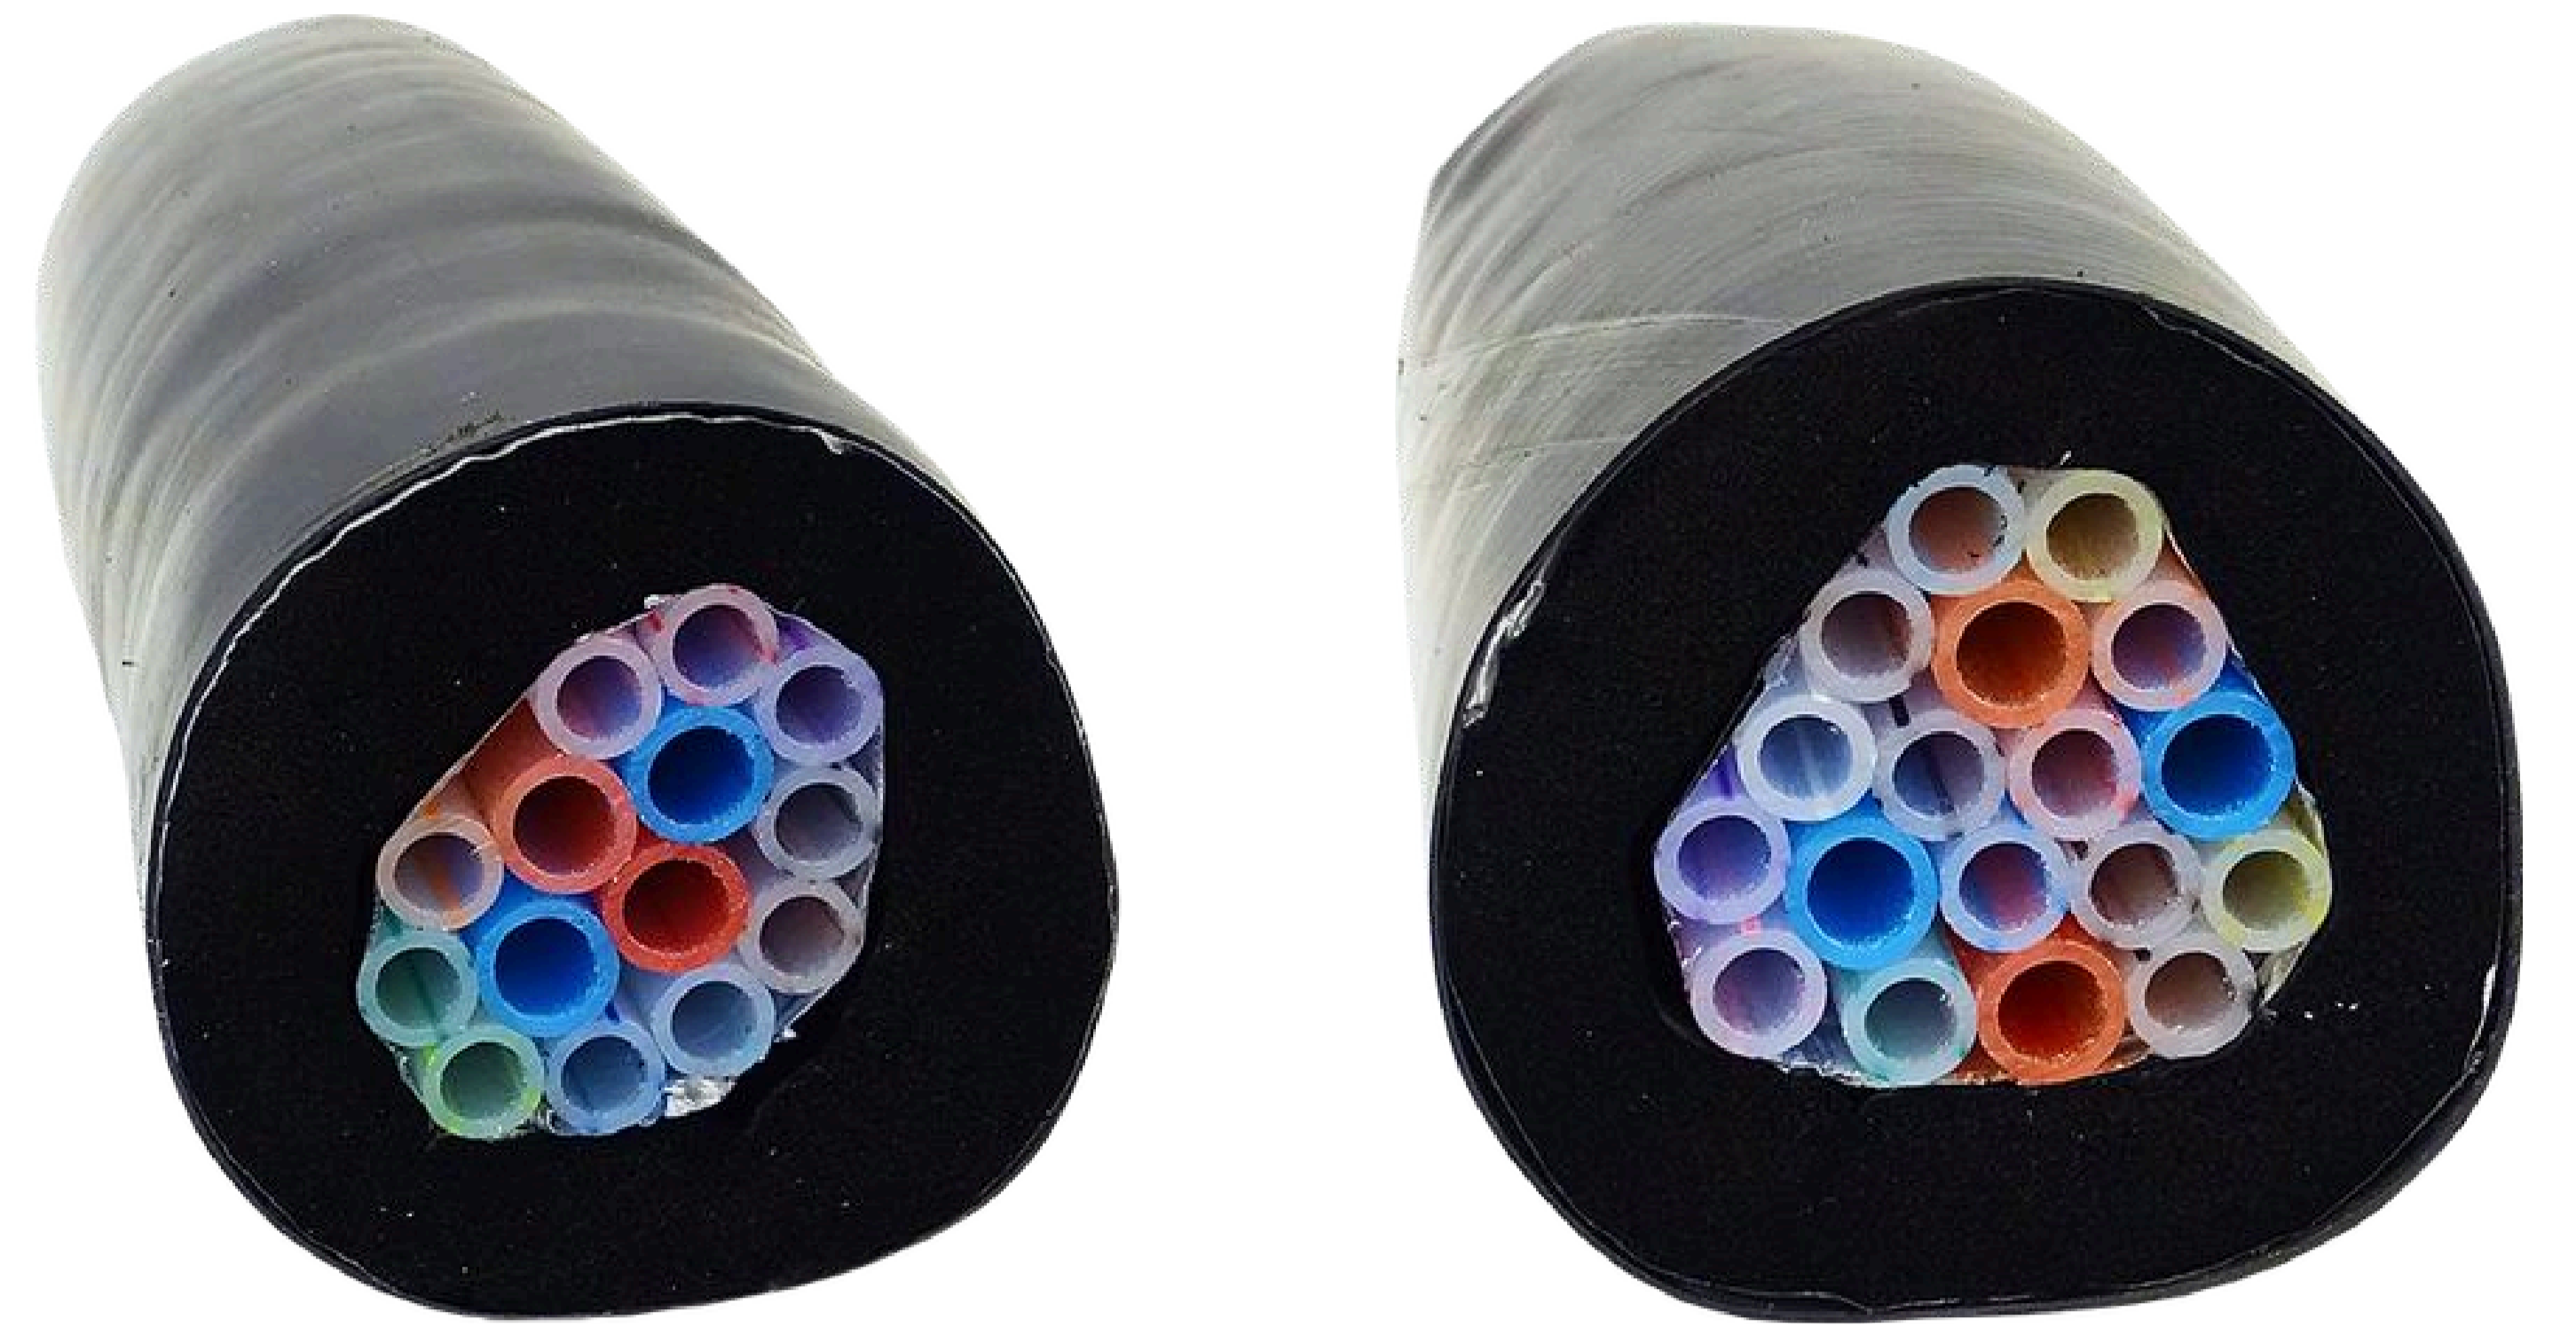

TRUNKLINE SPECS & BTU VALUES →

3/8" TRUNKLINE										BTU'S AT DISPENSE TEMPERATURE	
PART NO	DESCRIPTION	TUBE SPECIFICATION	PRODUCT LINES	TUBE SIZE ID X OD (PRODUCT TUBE)	GLYCOL LINES	TUBE SIZE ID X OD (GLYCOL TUBE)	BEVEX FIRE RATED JACKET	TRUNK-LINE OD inch	TRUNK-LINE OD mm	BTU/FT @ 36F/2.2C	BTU/FT @ 44F/6.7C
TRT16917Q	2+2	PE Ultra - Beer & Soft Drinks	2	3/8" x 1/2"	2	3/8" x 1/2"	YES	2 3/4"	70	7,2	6,3
TRE1445	2+2	PE Ultra - Beer & Soft Drinks	2	3/8" x 1/2"	2	3/8" x 1/2"	YES	2 7/8"	75	8,5	7,3
TRE1446	2+4	PE Ultra - Beer & Soft Drinks	4	3/8" x 1/2"	2	3/8" x 1/2"	YES	3 "	80	9,0	7,7
TRE1447	2+6	PE Ultra - Beer & Soft Drinks	6	3/8" x 1/2"	2	3/8" x 1/2"	YES	3 1/4"	85	9,4	8,0
TRE1448	2+8	PE Ultra - Beer & Soft Drinks	8	3/8" x 1/2"	2	3/8" x 1/2"	YES	3 1/2"	90	9,7	8,3
TRE1449	4+10	PE Ultra - Beer & Soft Drinks	10	3/8" x 1/2"	4	3/8" x 1/2"	YES	3 1/2"	90	10,2	8,7
TRE1461	4+12	PE Ultra - Beer & Soft Drinks	12	3/8" x 1/2"	4	3/8" x 1/2"	YES	3 3/4"	95	11,2	9,5
TRE1462	4+14	PE Ultra - Beer & Soft Drinks	14	3/8" x 1/2"	4	3/8" x 1/2"	YES	4 "	100	11,6	9,9
TRE1819	4+16	PE Ultra - Beer & Soft Drinks	16	3/8" x 1/2"	4	3/8" x 1/2"	YES	4 1/2"	115	12,1	10,3
TRE3142	4+20	PE Ultra - Beer & Soft Drinks	20	3/8" x 1/2"	4	3/8" x 1/2"	YES	4 1/2"	115	13,1	11

5/16" TRUNKLINE										BTU'S AT DISPENSE TEMPERATURE	
PART NO	DESCRIPTION	TUBE SPECIFICATION	PRODUCT LINES	TUBE SIZE ID X OD (PRODUCT)	GLYCOL LINES	TUBE SIZE ID X OD (GLYCOL TUBE)	BEVEX FIRE RATED JACKET	TRUNK-LINE OD inch	TRUNK-LINE OD mm	BTU/FT @ 36F/2.2C	BTU/FT @ 44F/6.7C
TRE1440	2+2	PE Ultra - Beer & Soft Drinks	2	5/16" x 7/16"	2	3/8" x 1/2"	YES	2 1/2"	65	6,89	5,9
TRE1441	2+4	PE Ultra - Beer & Soft Drinks	4	5/16" x 7/16"	2	3/8" x 1/2"	YES	2 3/4"	70	7,92	6,8
TRE1442	2+6	PE Ultra - Beer & Soft Drinks	6	5/16" x 7/16"	2	3/8" x 1/2"	YES	2 7/8"	75	8,56	7,3
TRE1443	2+8	PE Ultra - Beer & Soft Drinks	8	5/16" x 7/16"	2	3/8" x 1/2"	YES	3 "	78	9,08	7,7
TRE1495	2+10	PE Ultra - Beer & Soft Drinks	10	5/16" x 7/16"	2	1/2" x 11/16"	YES	3 "	80	9,38	8,0
TRE1444	4+10	PE Ultra - Beer & Soft Drinks	10	5/16" x 7/16"	4	3/8" x 1/2"	YES	3 "	80	9,72	8,3
TRE1489	4+12	PE Ultra - Beer & Soft Drinks	12	5/16" x 7/16"	4	3/8" x 1/2"	YES	3 1/4"	85	10,20	8,7
TRE1490	4+14	PE Ultra - Beer & Soft Drinks	14	5/16" x 7/16"	4	3/8" x 1/2"	YES	3 1/2"	90	11,19	9,6
TRE1820	4+16	PE Ultra - Beer & Soft Drinks	16	5/16" x 7/16"	4	3/8" x 1/2"	YES	4 1/2"	115	11,67	10
TRE3143	4+20	PE Ultra - Beer & Soft Drinks	20	5/16" x 7/16"	4	3/8" x 1/2"	YES	4 1/2"	115	12,66	10,8

1/4" TRUNKLINE										BTU'S AT DISPENSE TEMPERATURE	
PART NO	DESCRIPTION	TUBE SPECIFICATION	PRODUCT LINES	TUBE SIZE ID X OD (PRODUCT)	GLYCOL LINES	TUBE SIZE ID X OD (GLYCOL TUBE)	BEVEX FIRE RATED JACKET	TRUNK-LINE OD inch	TRUNK-LINE OD mm	BTU/FT @ 36F/2.2C	BTU/FT @ 44F/6.7C
TRE1436	2+4	PE Ultra - Beer & Soft Drinks	4	1/4" x 3/8"	2	3/8" x 1/2"	YES	2 1/2"	65	7,4	6,3
TRE1437	2+6	PE Ultra - Beer & Soft Drinks	6	1/4" x 3/8"	2	3/8" x 1/2"	YES	2 3/4"	70	7,9	6,7
TRE1438	2+8	PE Ultra - Beer & Soft Drinks	8	1/4" x 3/8"	2	3/8" x 1/2"	YES	2 7/8"	75	8,5	7,3
TRE1439	4+10	PE Ultra - Beer & Soft Drinks	10	1/4" x 3/8"	4	3/8" x 1/2"	YES	3 "	80	9,0	7,7
TRE1491	4+12	PE Ultra - Beer & Soft Drinks	12	1/4" x 3/8"	4	3/8" x 1/2"	YES	3 1/4"	85	9,7	8,3